


1200

PE tarpaulin Economy

ECONOMY 90 GR/M²

PE tarpaulins, lightweight and durable, find applications in camping, construction, agriculture, freight transport, events, vehicle protection, and industrial settings. Versatile and weather-resistant, they offer reliable protection in diverse environments.

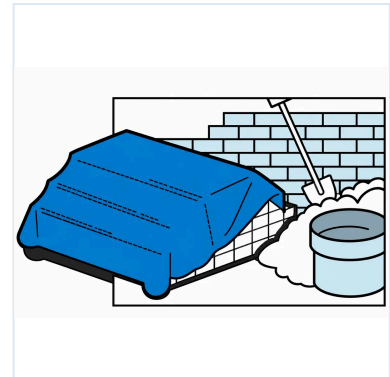

Technical specifications

Tensile strength	457N / 5cm According to ISO 13937-1
Tear strength	76N / 5cm According to ISO 13937-1
Temperature resistance	-40°C / +80°C

Product information

- Woven HDPE tape with both sides LDPE coating
- All around welded hem with reinforcing PP rope and aluminum eyelets every meter, inner ø12mm
- Each tarpaulin packed in a crystal clear PE bag, with neutral COVER insert leaflet, 4 languages and EAN-code
- Transport packing in sturdy 5-layer water resistant carton boxes
- Delivery on Euro pallets (80×120cm)
- Pallet height; semi approx. 125cm, full approx. 250cm

Customization

- Custom-size: small buying quantity, delivery time 3-4 months
- Different color and weight: minimum purchase order quantity approx. 50,000m², delivery time 3-4 months
- Private label, box or bale packing
- Product print possibility
- Optional: CORONA surface treatment technology for better adhesion of printed texts

- Optional: VCI anti-corrosion method actively protects your metal from oxidation (VpCI)

■ Sizes

Finished size (m)	 Orange	 Green	 Blue	 White	Quantity per box	Quantity per half pallet	Quantity per full pallet
2 × 3	✓	✓	✓	✓	20	560	960
3 × 4	✓	✓	✓	✓	10	280	400
3 × 5		✓		✓	8	224	352
4 × 5	✓	✓	✓	✓	6	168	264
4 × 6	✓	✓	✓	✓	6	144	240
4 × 8		✓			4	112	144
5 × 6	✓	✓	✓	✓	4	112	160
6 × 8	✓	✓	✓	✓	3	72	108
6 × 10	✓	✓	✓	✓	2	56	88
8 × 10	✓	✓	✓	✓	2	48	64
8 × 12		✓	✓	✓	1	36	52
10 × 12	✓	✓	✓	✓	1	28	40
10 × 15	✓	✓	✓	✓	1	24	36