


1300FR

PE fence tarpaulin FR

STANDARD 150 GR/M²

Flame-retardant PE fence covers offer enhanced safety for events, construction sites, and outdoor venues. These durable covers provide privacy, wind protection, and branding opportunities while meeting stringent fire safety standards.

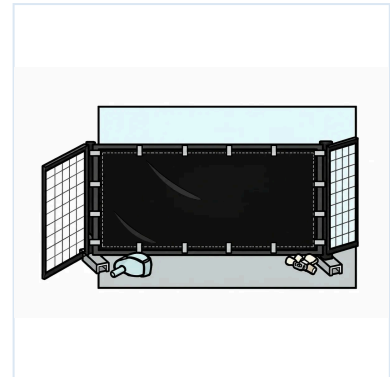

Technical specifications

Tensile strength	857N / 5cm According to ISO 13937-1
Tear resistance	187N / 5cm According to ISO 13937-1
Temperature resistance	-40°C / +80°C

Product information

- Woven HDPE tape with both sides LDPE coating
- All around welded hem with reinforcing PP rope and aluminum eyelets every meter, inner ø12mm
- Each tarpaulin provided with stitched FR label
- Flame Retardant (FR) product; concerning test report DIN4102-B1 available
- Each tarpaulin packed in a crystal clear PE bag, with neutral COVER insert leaflet, 4 languages and EAN-code
- Transport packing in sturdy 5-layer water resistant carton boxes
- Delivery on Euro pallets (80×120cm)
- Pallet height : semi pallet approx. 125cm, full pallet approx. 250cm
- 12 months warranty on UV resistance

Customization

- Custom-size: small buying quantity, delivery time 3-4 months
- Different color and weight: minimum purchase order quantity approx. 35,000m², delivery time 3-4 months
- Private label, box or bale packing

- Product print possibility
- Optional: VCI anti-corrosion method actively protects your metal from oxidation (VpCI)

Sizes

Finished size (m)	 White NVO	 Black NVO	Quantity per box	Quantity per half pallet	Quantity per full pallet
1.76 × 3.41	✓	✓	20	400	800