


2580

PE leno tarp

ECONOMY 140 GR/M²

Reinforced scaffold wrap is designed to reduce wind load on construction scaffolding. It provides a protective barrier against strong winds, enhancing scaffold stability and increasing safety for workers and materials. With its weather-resistant properties, it also helps prevent damage from wind, making it an essential component of construction protection in windy conditions.

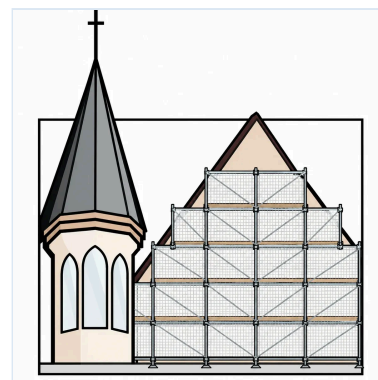

■ Technical specifications

Tensile strength	457N / 5cm According to ISO 13937-1
Tear strength	76N / 5cm According to ISO 13937-1
Temperature resistance	-40°C / +80°C

■ Product information

- HDPE mesh with both sides transparent LDPE coating
- 2% UV stabilized
- 4x longitudinal welded PE eyelet bands (14+7+7+7cm) with pre-punched eyelets holes at every 10m interval, inner Ø 15 mm
- Each leno tarp packed in a clear PE bag with neutral COVER sticker, 4 languages and EAN code
- Transport packing in bales of leno tarp
- Delivery on Euro pallets (80×120cm)
- Pallet height approx. 115cm

■ Customization

- Custom-size, different color and/or weight, minimum order quantity and term of delivery after consultation
- Private label, box or bale packing
- Also available in Flame Retardant (FR) quality
- Product print possibility
- Optional: CORONA surface treatment technology for better adhesion of printed texts)

Sizes

Finished size (m)	 White	Mounting strap spacing (cm)	Quantity per bale	Quantity per pallet
0.80 × 20	✓	14 + 7	8	144
1.10 × 20	✓	14 + 7	6	108
1.70 × 20	✓	14 + 7 + 7	4	72
2.20 × 20	✓	14 + 7 + 7	3	54
2.70 × 10	✓	14 + 7 + 7 + 7	6	96
2.70 × 20	✓	14 + 7 + 7 + 7	3	48
3.20 × 10	✓	14 + 7 + 7 + 7	6	96
3.20 × 20	✓	14 + 7 + 7 + 7	3	48