


1500

PVC tarpaulin Standard

STANDARD 600 GR/M²

PVC tarpaulins, extra heavyweight and durable, find applications in camping, construction, roofing, agriculture, freight transport, events, vehicle protection, and industrial settings. Versatile and weather-resistant, they offer reliable protection in diverse environments.

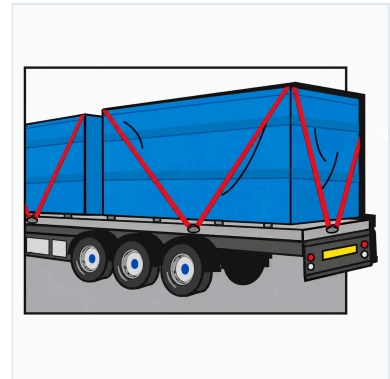

Technical specifications

Tensile strength	2400N / 5cm According to DIN 53352
Tear strength	300N / 5cm According to DIN 53363
Temperature resistance	-30°C / +70°C

Product information

- Polyester webbing with both sides PVC coating
- 5% UV stabilized
- All around welded hem, brass eyelets every meter, inner Ø 18mm
- Each piece packed in a crystal clear PE bag, with neutral COVER insert leaflet, 4 languages and EAN-code
- Delivery on Euro pallets (80×120cm)
- Pallet height 250cm

Customization

- Custom-size in small buying quantity: delivery time 3-4 months
- Different color and/or weight: minimum purchase order quantity approx. 10,000m², delivery time 3-4 months
- Private label in bale packing
- Product print possibility

Sizes

Cut size (m)	 Green	 Blue	Quantity per bale	Quantity per pallet
2 × 3	✓	✓	1	96
3 × 4	✓	✓	1	48
4 × 4		✓	1	40
4 × 6	✓	✓	1	24
5 × 6	✓	✓	1	16
6 × 8	✓	✓	1	12
6 × 10	✓	✓	1	8
8 × 10	✓	✓	1	8
10 × 12	✓	✓	1	4